

Standard Equipment & Options

Standard Equipment	Optional Equipment
Folding ROPS Frame	Road Lights (RTA)
Reversing Alarm	Rear View Mirror
Flashing Beacon	Concrete Skip Attachment
Towing Bracket	

Dealer

Effective Date: 01 January 2009. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. © 2009 Terex Corporation. ♻️ Printed on material using 55% recycled fibre from both pre and post-consumer sources, together with 45% virgin ECF fibre from sustainable forests. DS TA2/S 0209-EN

Terex United Kingdom Limited
 Central Boulevard, ProLogis Park, Coventry, England CV6 4BX
 Tel +44 (0) 2476 339400 Fax +44 (0) 2476 339500
 Email cov.enquiries@terex.com www.terex.co.uk

TA2 TA2S POWER TIP/SWIVEL SITE DUMPERS



TA2 TA2S

Specification

Payload	2000 kg
Gross Engine Power	24.5 kW (32.6 hp)
Max Skip Capacity	1200 Litres

Features

- Large heaped skip capacities (1200 Litres).
- "Rental Tough" designs and fabrications to keep you working in the toughest of conditions.
- Exceptional service access and ease of maintenance built into every machine.
- High ground clearance, low centre of gravity for superb stability and site accessibility.
- Powerful, reliable and economical Kubota engines.
- Power Swivel (S) enables effective placement of load to either side - useful for trench filling or small sites.
- Narrow width (under 1.5m) for access in confined spaces.
- All TA2 models combine powerful Kubota 24.5kW engines with well matched mechanical or hydrostatic transmissions engineered for maximum performance in heavy ground conditions. This ensures that the TA2 will get through where lesser machines are defeated.

Specifications

Performance		
	TA2	TA2S
Payload (kg)	2000	2000
Unladen Weight (kg)	1900	2020
Skip Capacity - Water (ltr)	750	750
- Struck (ltr)	1000	1000
- Heaped (ltr)	1200	1200
Engine	Kubota D1703M	
- Gross Power - kW (hp)	24.5 (32.6)	
- Capacity	1647 cc	
- Maximum Torque	108 Nm	
Tyre Size	10.0/75x15.3x8ply	
Drive	3/1 Manual - permanent 4WD	
Max Travel Speed - mph (kph)	10.0 (16.0)	10.0 (16.0)
Gradeability	25 %	25 %
Fuel Tank Capacity	23.5 Litres	23.5 Litres
Hydraulic Tank Capacity	25 Litres	25 Litres

Hydraulic System (Gear Pump)

	TA2	TA2S
Flow rate	21 l/min	21 l/min
Operating Pressure	210 bar	210 bar

Braking System

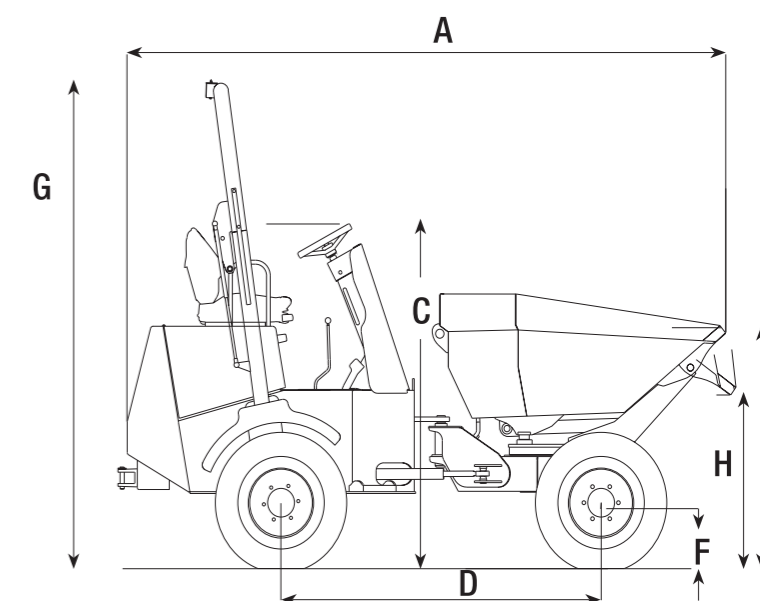
	TA2	TA2S
Working Brake	Foot Brake - Oil Immersed Discs on Front	
Parking Brake	Over Centre Locking - Oil Immersed Disc Front Axle	

Electrical System

	TA2	TA2S
Voltage	12V	12V
Battery	74 Ah	74 Ah
Alternator	55 A	55 A

Dimensions

B = Overall Width (not shown)


Dimensions (mm)

		TA2	TA2S
A	Total Length	3550	3550
B	Total Width (not shown)	1492	1492
C	Height to Top of Steering Wheel	1923	1923
D	Wheelbase	1900	1900
E	Height to Front Lip of Skip (untipped)	1266	1335
F	Ground Clearance	275	275
G	Height to Top of ROPS (raised)	2691	2691
H	Height to Front Lip of Skip (tipped)	940	1008
	Discharge Height	886 mm	954 mm
	Turning Radius to Outside of Skip	3680 mm	3680 mm
	Steering Angle	+/- 36.5°	+/- 36.5°
	Oscillation	+/- 10.5°	+/- 10.5°
	Tipping Type	Forward Tip	Swing Tip